


MULTICORE SPEAKER CABLES

CVS LK**N**

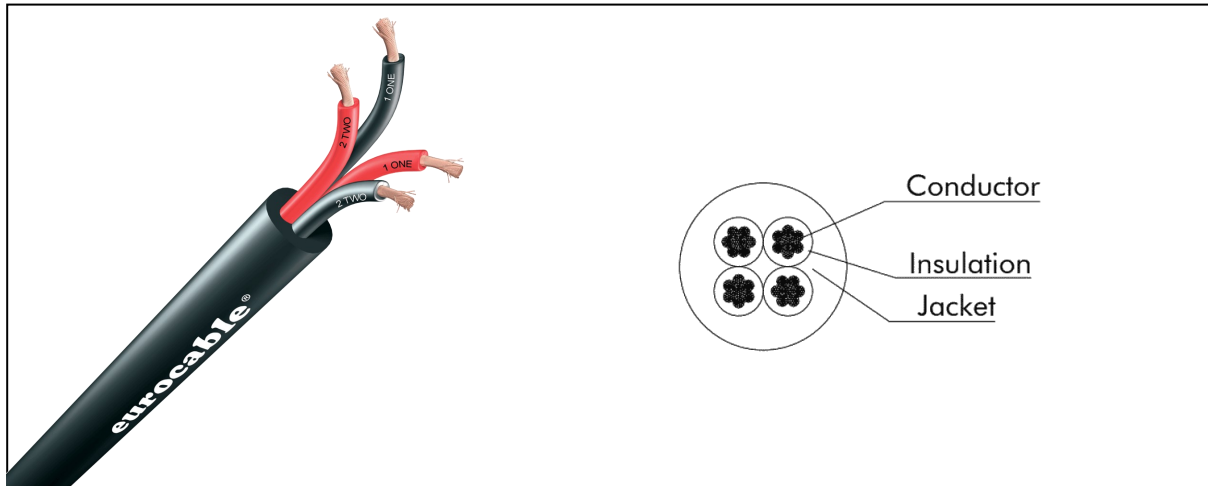

CVS LKCode			04N25	04N40	06N25	06N40	08N25	08N40	18N40	24N40
GENERAL DATA										
Cable	O.D.		11.10 mm	13.20 mm	14.20 mm	15.50 mm	16.00 mm	19.50 mm	22.80 mm	26.80 mm
	Standard reels		200 m						200 m	
	Weight	Kg/100m	21.50	34.50	35.00	47.60	47	65.50	106	140
	Operating temperature		5°C/+70°C						- 15°C / + 80° C	+ 5°C / + 70° C
Jacket	Material		PVC fire resistant							
	Nominal Thickness		≥ 1.20 mm	≥ 1.80 mm	≥ 1.60 mm	≥ 1.50 mm	≥ 1.60 mm	≥ 1.80 mm	2.00 mm	2.20 mm
Conductor	D.C.R. [ohm/km] at 20° C		8	5	8	5	8	5		
	Quantity		4		6		8		18	24
	Strand		80 x 0.2 mm	128 x 0.2 mm	80 x 0.2 mm	128 x 0.2 mm	80 x 0.2 mm	128 x 0.2 mm	128 x 0.20 mm	
	Area/AWG		2.50 mm²/13	4.00 mm²/11	2.50 mm²/13	4.00 mm²/11	2.50 mm²/13	4.00 mm²/11	4.00 mm²/11	
	Insul. O.D.		3.4	4.0	3.4	4.0	3.4	4.0	3.8 mm	3.6 mm
	Material		PVC fire resistant						Annealed bare copper PVC flame resistan insulated	