


MICROPHONE CABLES

CVS LK02*6E

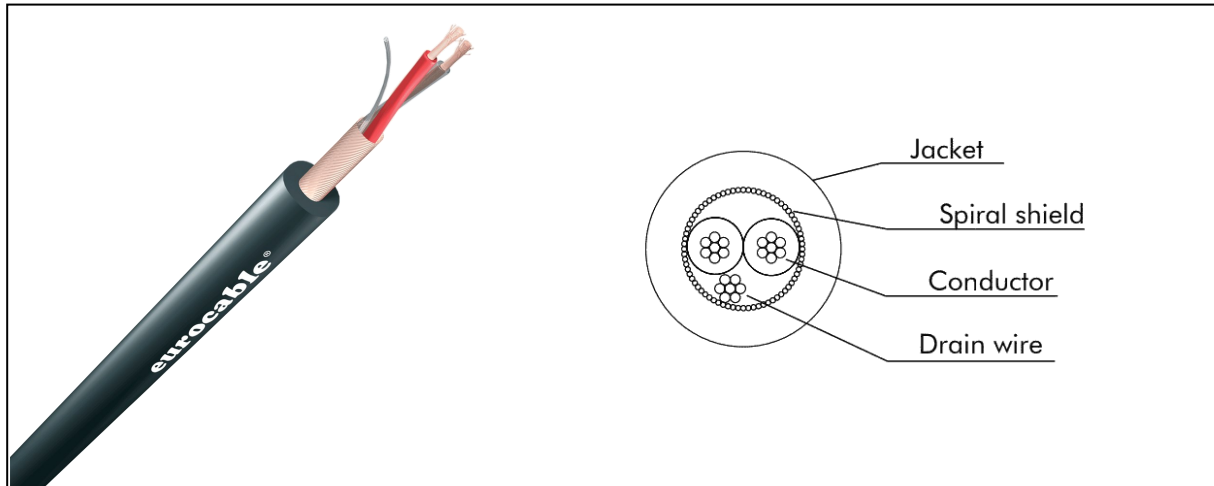

CVS LKCode			02N6E	02B6E	02G6E	02R6E	02V6E	02Y6E
ELECTRICAL DATA								
D.C.R. at 20°C	Conductor		≤ 78 ohm/km					
	Shield		≤ 39 ohm/km					
Capacitance	Conductor/Conductor 1 KHz		160 pF/m					
	Conduc- tor/Shield	1 KHz	80 pF/m					
Nominal Impedance	1 KHz		600 ohm/100m					
Attenuation	1 KHz		0.50 db/100m					
Inductance			< 58 μH/100 m					
Vel. of Prop.			-					
GENERAL DATA								
Cable	O.D.		6.00 mm					
	Standard reels		100 m					
	Weight	Kg/100m	4,60					
	Operating temperature		-5°C/+70°C					
Jacket	Material		PVC					
	Color		Black	Blue	Grey	Red	Green	Yellow
	Nominal Thickness		1.80 mm					
Shield	Material		Bare copper, Spiral shield plus 20 AWG tinned copper drain wire					
	Coverage		100%					
Conductor	Qty		2					
	Strand		30 x 0.10 mm					
	Area/AWG		0.22 mm²/24					
	Insul. O.D.		1.10 mm					
	Material		Bare copper polyethylene insulated					