


MULTIPAIR AUDIO CABLES COPPER SHIELD

CVS LKSS**C

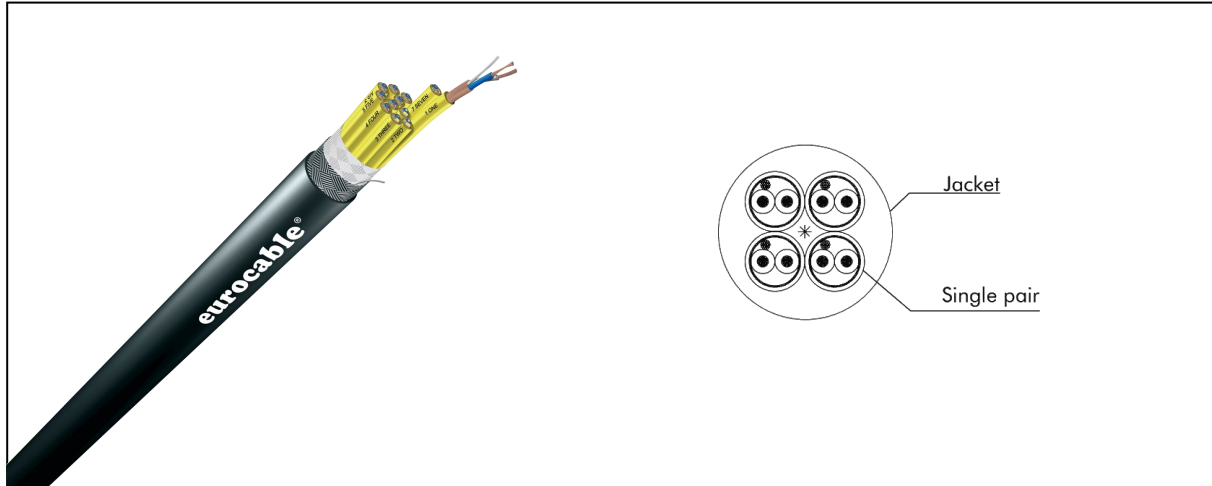

| CVS LKSSCode | | 02C | 04C | 08C | 12C | 16C | 20C* | 24C* | 28C* | 32C* | 40C* | 48C* | |
|-------------------------|-------------------------------|--------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|--|
| ELECTRICAL DATA | | | | | | | | | | | | | |
| D.C.R. at 20°C | Conductor | 85 ohm/km | | | | | | | | | | | |
| | Shield | 40 ohm/km | | | | | | | | | | | |
| Capacitance | Conductor/ Conductor 1 KHz | 100 pF/m | | | | | | | | | | | |
| | Conductor/ Shield 1 KHz | 180 pF/m | | | | | | | | | | | |
| Nominal Impedance 1 KHz | | 530 ohm/100 m | | | | | | | | | | | |
| Attenuation 1 KHz | | 0.20 db/100 m | | | | | | | | | | | |
| Induttance | | 70 µH/100 m | | | | | | | | | | | |
| GENERAL DATA | | | | | | | | | | | | | |
| Pairs cable | | 2 | 4 | 8 | 12 | 16 | 20 | 24 | 28 | 32 | 40 | 48 | |
| Cable | O.D. | 8.0 mm | 9.6 mm | 12.8 mm | 14.9 mm | 16.9 mm | 18.9 mm | 20.3 mm | 21.6 mm | 23.2 mm | 25.4 mm | 27.8 mm | |
| | Standard reels | 500 m | | | | | 200 m | | | | | | |
| | Weight Kg/100m | 10.30 | 15.40 | 27.00 | 36.80 | 46.30 | 60.50 | 67.90 | 73.60 | 86.80 | 106.70 | 123.20 | |
| | Operating temperature | -20° C/+70° C | | | | | | | | | | | |
| Jacket | Material | PVC | | | | | | | | | | | |
| | Nominal Thickness | 1.25 mm | 1.50 mm | 1.75 mm | 1.85 mm | 2.05 mm | | | | 2.25 mm | 2.45 mm | | |
| Shield | Material | Bare copper, Spiral shield plus 24 AWG tinned copper drain wire | | | | | | | | | | | |
| | Coverage | > 95% | | | | | | | | | | | |
| Conductor | Qty | 2 x 2 | 4 x 2 | 8 x 2 | 12 x 2 | 16 x 2 | 20 x 2 | 24 x 2 | 28 x 2 | 32 x 2 | 40 x 2 | 48 x 2 | |
| | Strand | 28 x 0.10 mm | | | | | | | | | | | |
| | Area/AWG | 0.22 mm ² /24 | | | | | | | | | | | |
| | Insul. O.D. | 1.00 mm | | | | | | | | | | | |
| Material | | Annealed bare copper. XLPE insulated | | | | | | | | | | | |