


MULTIPAIR AES/EBU DIGITAL AUDIO CABLE ALUMINIUM

CVS LKSSAD**C

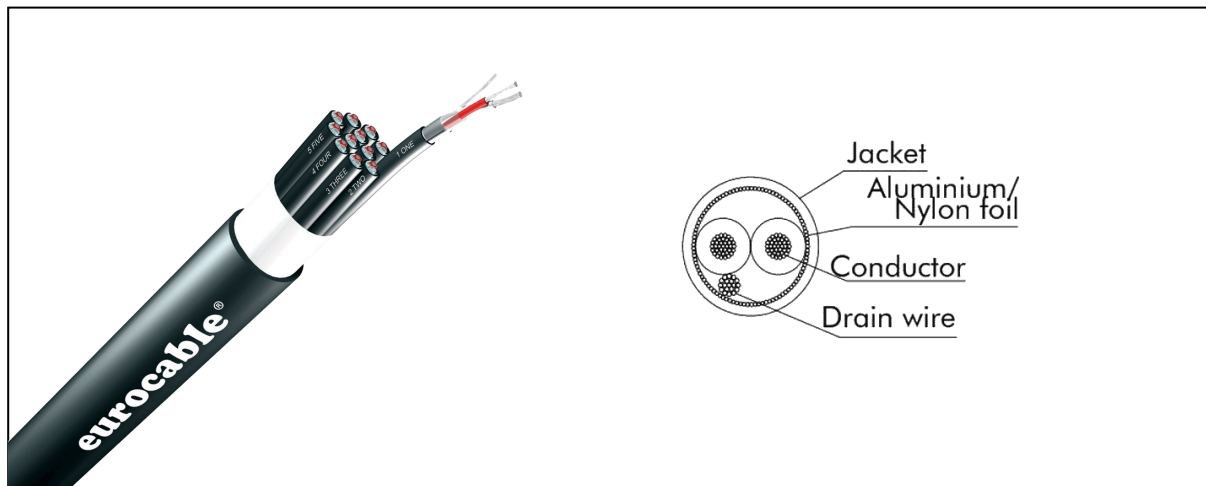

CV LKSSADCode		02C	04C	08C	12C	16C	24C*	32C*	48C*
ELECTRICAL DATA									
D.C.R. at 20°C	Conductor	< 143 ohm/km							
	Shield	< 40 ohm/km							
Capacitance	Conductor/Conductor 1 KHz	50 pF/m							
	Conductor/Shield 1 KHz	100 pF/m							
Nominal Impedance 3 - 8 MHz		110 ohm/100 m							
Attenuation 3 - 8 MHz		7 - 10 db/100 m							
Vel. of Prop.		80%							
GENERAL DATA									
Pairs cable		2	4	8	12	16	24	32	48
Cable	O.D.	8.80 mm	10.30 mm	12.90 mm	15.40 mm	17.40 mm	22.20 mm	25.50 mm	30.80 mm
	Standard reels	500 m					200 m		
	Weight Kg/100m	8.50	12.00	18.00	25.00	32.50	48.20	61.70	88.30
	Operating temperature	-20°C/+70°C							
Jacket	Material	PVC							
	Nominal Thickness	1.20 mm	1.30 mm			1.45 mm	1.65 mm	1.75 mm	1.90 mm
Shield	Material	Aluminium - Mylar foil, Shield plus tinned copper drain wire							
	Coverage	100%							
Conductor	Qty	2 x 2	4 x 2	8 x 2	12 x 2	16 x 2	24 x 2	32 x 2	48 x 2
	Strand	7 x 0.16 mm							
	Area/AWG	0.14 mm²/26							
	Insul. O.D.	1.20 mm							
	Material	Annealed tinned copper cellular polyolefine insulated							