



MULTI-CONDUCTOR LIGHTING POWER CABLES


CVS LK6/3G2.5

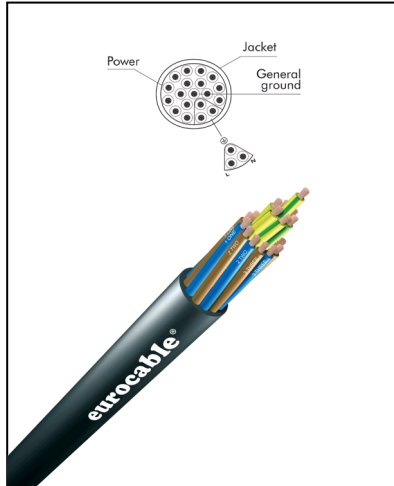

CVS LK6/3G4*

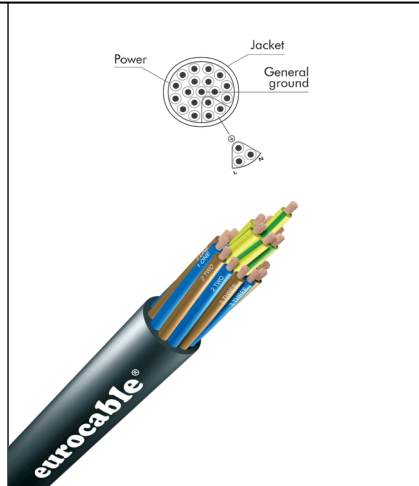

CVS LK19G1.5

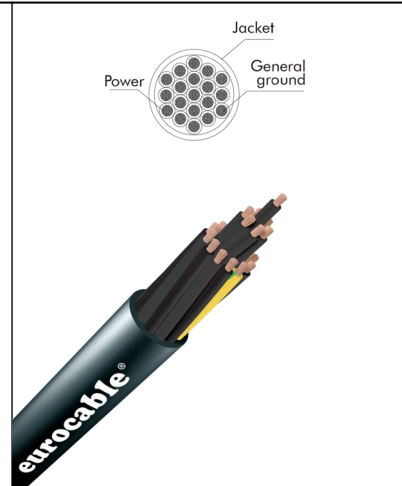

		CVS LK6/3G2.5	CVS LK6/3G4*	CVS LK19G1.5	
GENERAL DATA					
Cable	O.D.		18.60 mm	22.40 mm	14.90 mm
	Standard reels		200 m		
	Weight	Kg/100m	67.90	100.50	45.20
	Operating temperature		-20°C/+70°C		
Jacket	Material		PVC TM2		
	Nominal Thickness		3.00 mm	3.70 mm	1.50 mm
Conductor	D.C.R. at 20° C		≤ 8.31 ohm/km	≤ 5.43 ohm/km	≤ 14.20 ohm/km
	Insulation Resistance		> 128 Mohm/km	-	> 200 Mohm/km
	Voltage test		2500 Vc.ax5' cond/cond	3000 Vc.ax5' cond/cond	2500 Vc.ax5' cond/cond
	Quantity		19		
	Strand		48 x 0.25 mm	65 x 0.25 mm	28 x 0.25 mm
	Area/AWG		2.31 mm²/13	3.34 mm²/12	1.37 mm²/16
	Insulation O.D.		3.00 mm	3.70 mm	2.50 mm
	Material		Annealed copper TM2 PVC flame retardant insulated		