


MULTICORE SPEAKER + AES/EBU DIGITAL AUDIO HYBRID CABLES

CVS LK**N40AD2

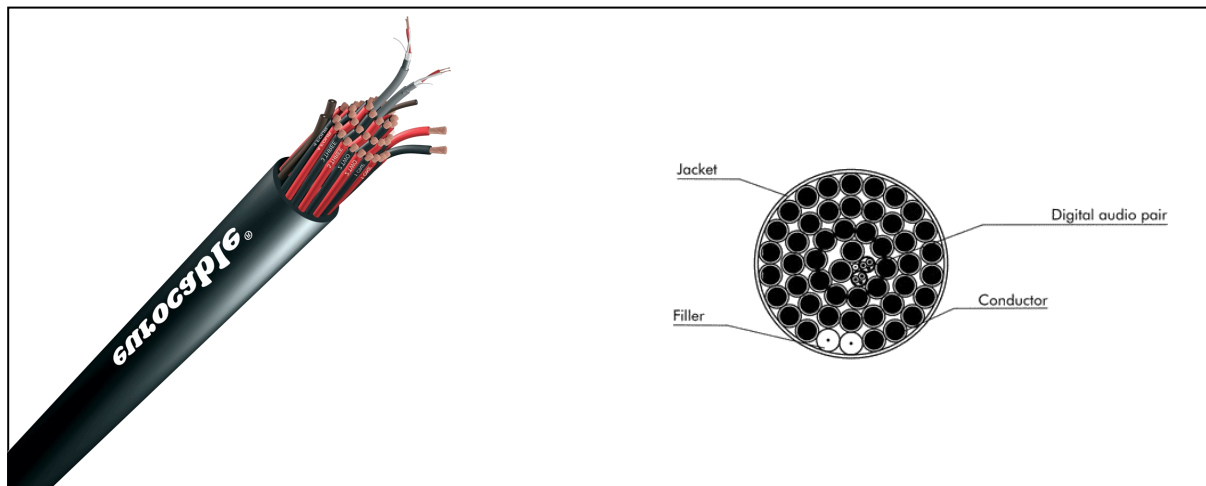

		CVS LK36N40AD2*	CVS LK48N40AD2*	Speaker	Audio
GENERAL DATA					
Cable	O.D.	≤ 31.10 mm	≤ 35.00 mm	3.60 mm	1.20 mm
	Standard reels	92 m			
	Weight Kg/100m	197	257	-	
	Operating temperature	-20° C/+70° C			
Jacket	Material	PVC			
	Nominal Thickness	2.10 mm		1.00 mm	0.60 mm
Shield	Material	-			Aluminium - Polyester foil + tinned copper drain wire 7 x 0.16 mm
	Coverage	-			
Conductor	Qty	-		36 (36N40AD2) 48 (48N40AD2)	2
	Strand	-		128 x 0.20 mm	7 x 0.16 mm
	Area/AWG	-		4.00 mm²/11	0.14 mm²/26
	Insul. O.D.	-		3.60 mm	1.20 mm
	Material	-		Annealed bare copper PVC insulated	Annealed tinned copper polyolefine insulated