



AX5 TriplePAR



Optical

Colours
RGBAW
Total LED power
45W
Luminous Flux
1080Lm*
Emittance (@2m)
4800Lx*
CRI
92
Strobe
0-25Hz
Beam Angle
13°
Pixels
1

Construction



Housing
Aluminium
IP Rating
IP65
Relative humidity
0-100%
Operating Temperature
0-40 °C
32-104 °F
Weight
3.4kg
Dimensions
141 x 190 x 214 (mm)

Accessories

 IR remote control
ARC1
 32° Flood filter
AX5-FF(included)
 17°x 46° Wallwash filter
AX5-WWF (Included)
 Spigot (3/8" & 1/4"-20 threads)
 AX1-BLT
 Charging case
AX5-CHRS


Electrical

Battery
LG Chem Lithium-ion
Battery Lifetime
70% after 300 cycles
LED Lifetime
50.000 Hours
Charging time (nominal)
5 Hours
Input Voltage
90-264V 47-63Hz
Input Current
1.8A/115VAC ~ 1.0A/230VAC
Inrush Current
Cold start 30A/115VAC ~
60A/230VAC

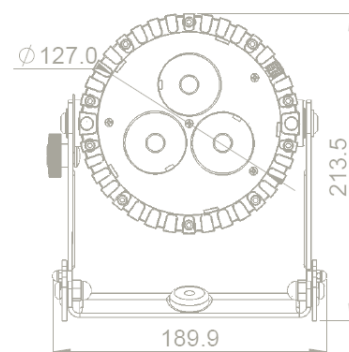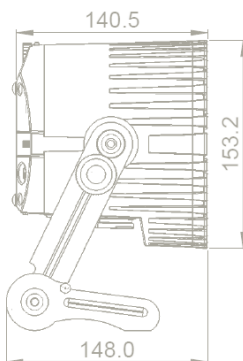

Control

Wireless Modules
865-870MHz
902-928MHz
2.4GHz
Range
300m | 330 Yards
DMX
Supports CRMX, W-DMX and XLR-DMX

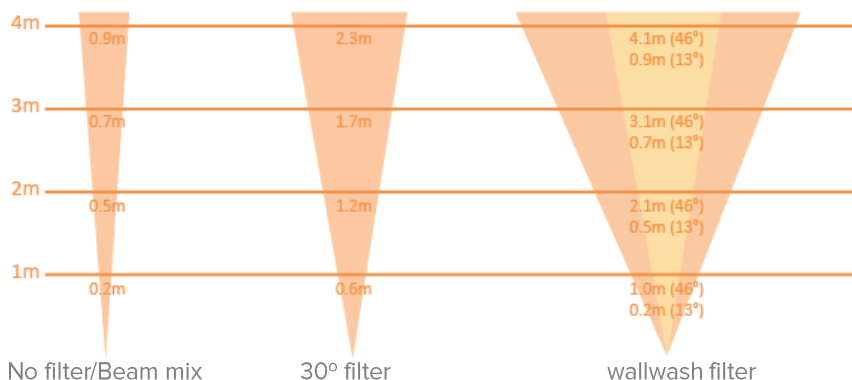

No filter/Beam mix

30° filter

wallwash filter