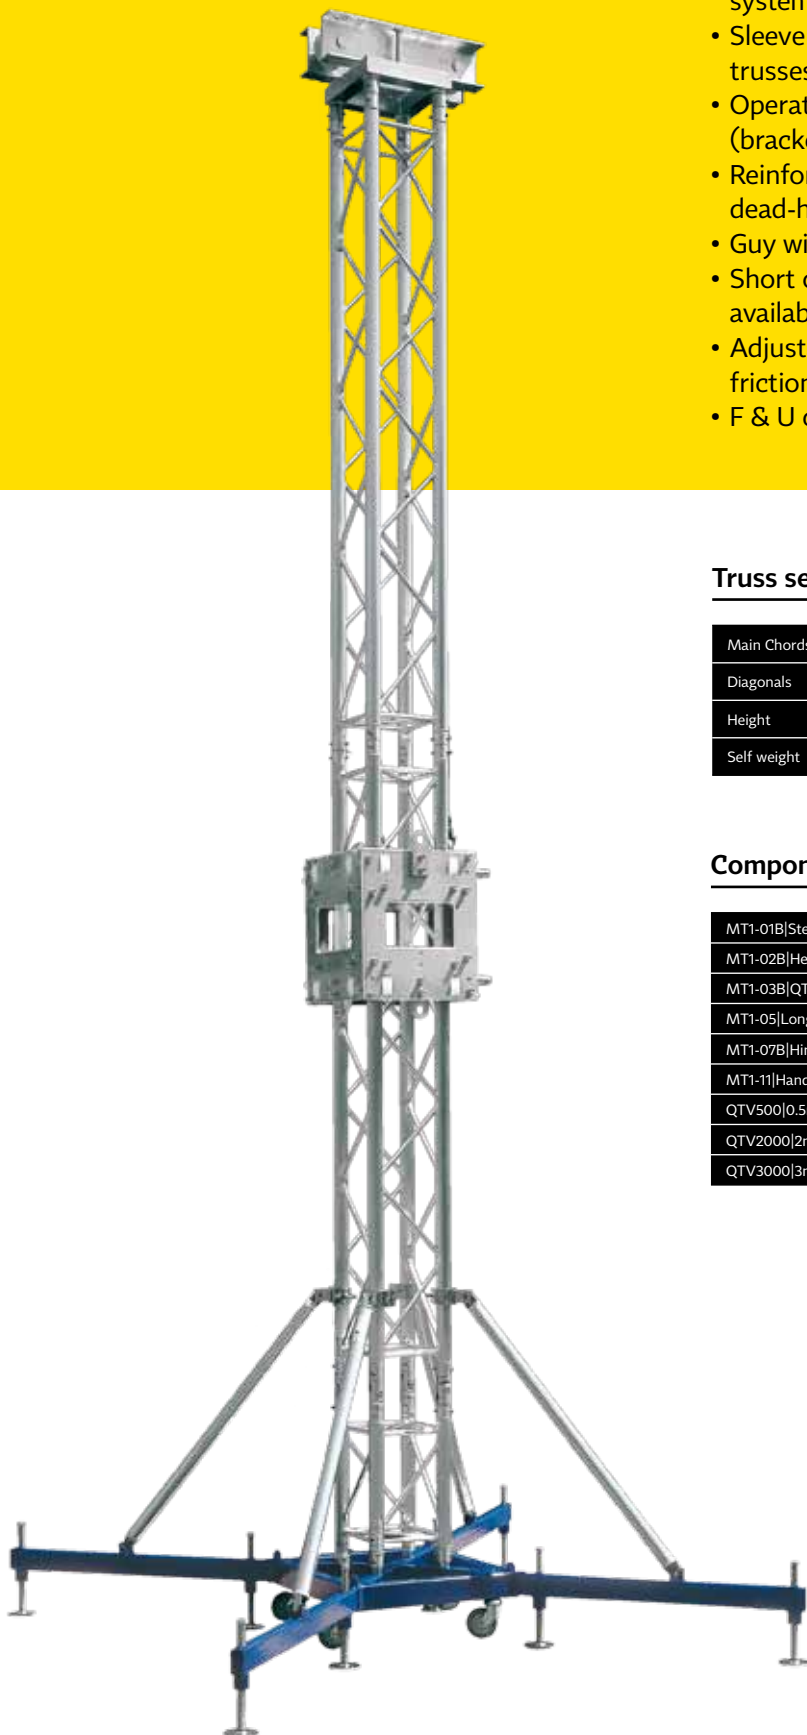


MT1 tower

- Compact, heavy-duty M290 series tower system
- 7.5m (24.60 ft) max height
- For use independently or within MR1T and MR2 roof systems
- Sleeve block designed for use with M290 & M390 trusses
- Operate with manual chain hoist or electric chain hoist (bracket required)
- Reinforced head section with built-in feature for dead-hanging
- Guy wire connection points via bolt-on hangers
- Short or long outriggers (incl. stabilising brace) available
- Adjustable base feet with rubber pads for optimal friction
- F & U compatible versions available



Truss series M290V

Main Chords	mm	in	48x3 (1.89x0.12)
Diagonals	mm	in	16x2 (0.62x0.08)
Height	m	ft	7.5 (24.6)
Self weight	kg	lbs	201 (443)

Components for MT1 7.5m tower

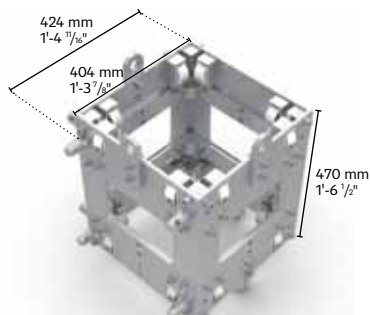
MT1-01B SteelBase	1 piece
MT1-02B HeadSection LTG	1 piece
MT1-03B QTB SleeveBlock Sh3.25t	1 piece
MT1-05 LongOutrigger	4 pieces
MT1-07B Hinges 4pcs	1 set
MT1-11 HandChainHoist+Bag	1 piece
QTV500 0.5m	1 piece
QTV2000 2m	2 pieces
QTV3000 3m	1 piece


MT1-01B|SteelBase

Weight	
kg	lbs
33.00	(72.66)

Steel base

Robust steel base gives stability to the tower.
Equipped with wheels for easy positioning during setup.


MT1-02B|HeadSection|forChain

Weight	
kg	lbs
13.00	(28.65)

Head section for chain

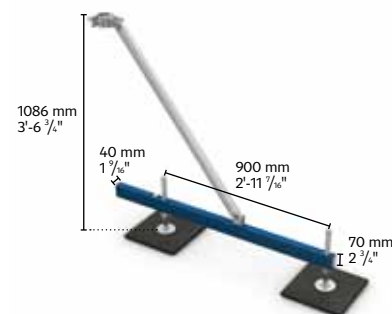
Fitted with steel pulleys for 7 - 8mm (0.28 - 0.31") chain
Alternative dimensions available after consultation


MT1-02B|HeadSection|LTG

Weight	
kg	lbs
8.00	(17.62)

Head section for steel wire


Fitted with dead hang hook


MT1-03B|QTB|SleeveBlock|Sh3.25t

Weight	
kg	lbs
46.00	(101.29)

Sleeve block

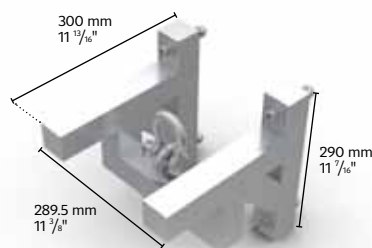
Consists of 10mm (0.39") al. plates connected with steel components.
Can be attached to M290 & 390 Quatro


MT1-04|ShortOutrigger

Weight	
kg	lbs
5.00	(11.02)

Short outrigger

Including adjustable spindles, rubber pads


MT1-05|LongOutrigger

Weight	
kg	lbs
16.00	(35.23)

Long outrigger

1.2m (3.94") long, including adjustable spindles; rubber pads


MT1-07B|Hinges|4pcs

Weight	
kg	lbs
2.40	(5.28)

Hinges

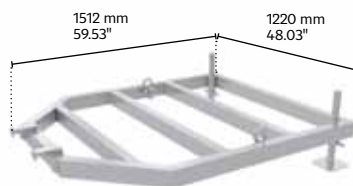
Used to connect the vertical tower pieces and to allow for tilt-up assembly; set of 4pcs


MT1-09|BracketForMotor|Sleeve

Weight	
kg	lbs
6.00	(13.21)

Bracket for chain hoist

Used for electric chain hoist attachment to sleeve block to achieve max. loading


MT1-10|FixSet|wire+2xSh2t

Weight	
kg	lbs
3.00	(6.61)

Safety wire

Used over MT1 mast top to secure the sleeve block; protected with clear pvc


MT1-11|HandChainHoist+Bag

Weight	
kg	lbs
25.00	(55.05)

Manual chain hoist

Uses 10m chain, including chain bag, SWL 1t

MT1-01|BallastBase

Weight	
kg	lbs
29.00	(64.00)

Designed to stack flat with smooth sides.

Integrated guy wire points.
Max. load: 2000 kg (4409 lbs)

MT1-OutriggerHolder|2pcs

Weight	
kg	lbs
4.60	(20.00)

Designed to secure outriggers to the steel base for easy transport and storage.