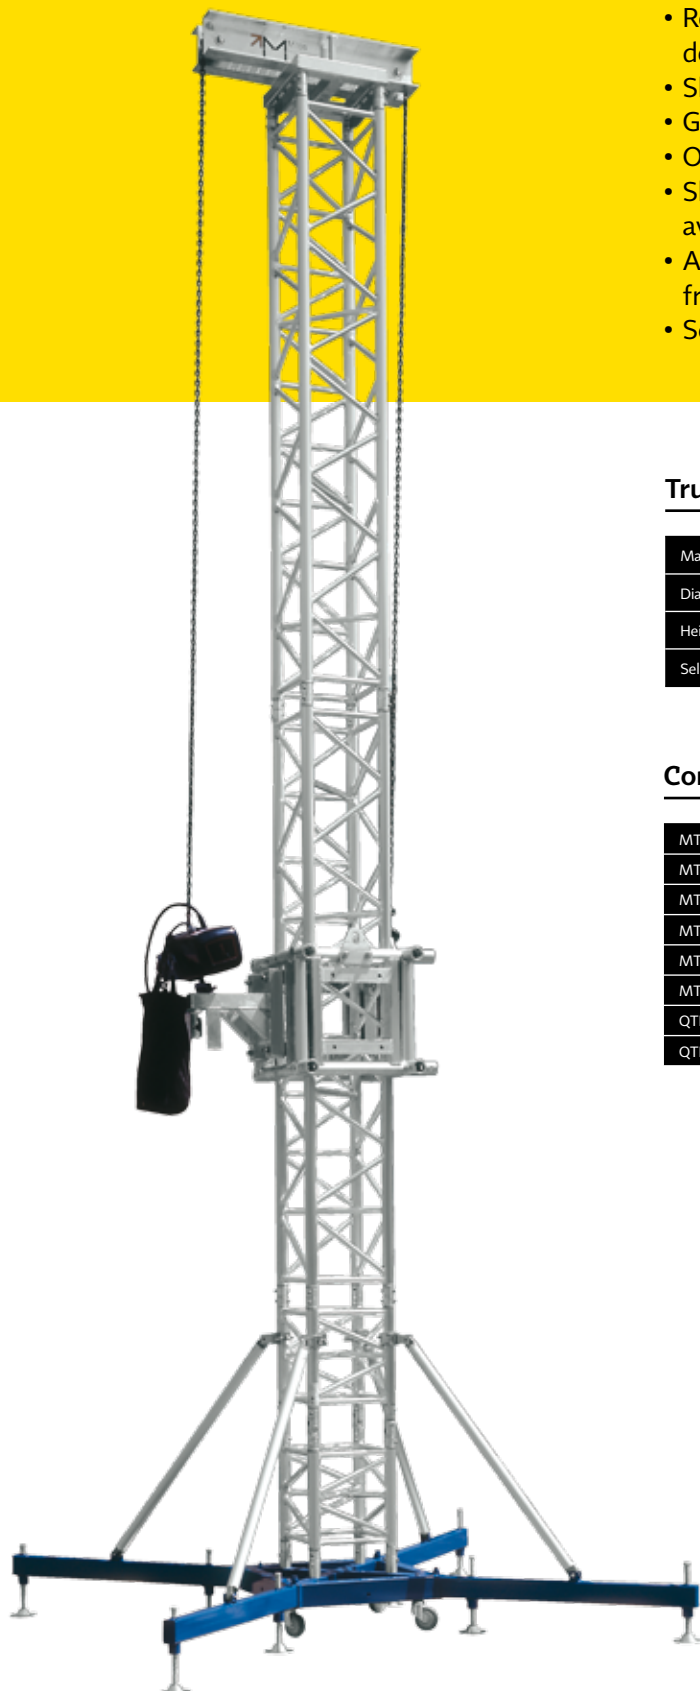


# MT2 tower




- Heavy-duty M390KT ladder truss series tower system - 12.5 m (41.0 ft) max height
- Sleeve block options for M400 & M520 & M950 ranges
- Reinforced head section with built-in feature for dead-hanging
- Sleeve block chain hoist connection bracket available
- Guy wire connection points via extra bolt-on hangers
- Optional tower erecting frame available
- Short or long outriggers (incl. stabilising brace) available
- Adjustable base feet with rubber pads for optimal friction
- Scaffold type base feet available on request

## Truss series M390KT

Main Chords	mm	in	50x4 (2x0.16)
Diagonals	mm	in	25x3 (0.98x0.12)
Height	m	ft	12.5 (41)
Self weight	kg	lbs	352 (776)

## Components for MT2 12.5m tower

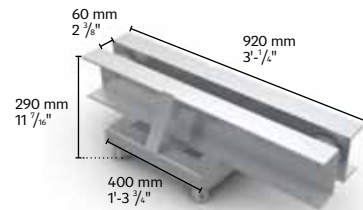
MT2-01B SteelBase	1 piece
MT2-02B HeadSection	1 piece
MT2-03 QTP/RTO SleeveBlock	1 piece
MT2-05 LongOutrigger	4 pieces
MT2-07B Hinges 4pcs	1 set
MT2-08 BracketForMotor Base	1 piece
QTKT500 0.5m	1 piece
QTKT3000 3m	4 pieces


**MT2-01B|SteelBase**

Weight	
kg	lbs
42.00	(92.48)

**Steel base**

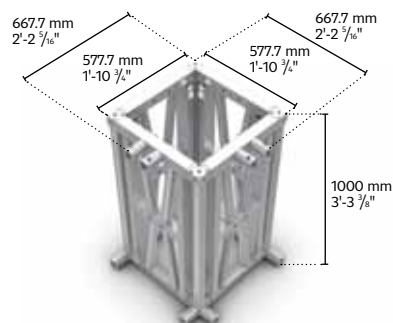
For use with M390KT QUATRO  
Equipped with wheels for easy movement during setup.


**MT2-02B|HeadSection**

Weight	
kg	lbs
25.00	(55.05)

**Head section**

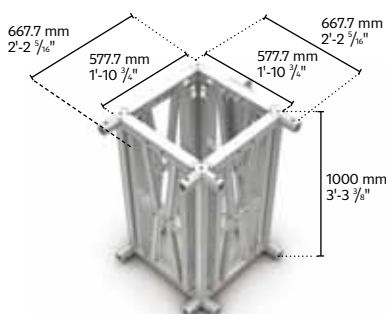
Fitted with steel pulleys for 7 - 8mm (0.28 - 0.31") chain  
Alternative dimensions available after consultation


**MT2-03|FTT|SleeveBlock**

Weight	
kg	lbs
80.00	(176.37)

**Sleeve block FTT**

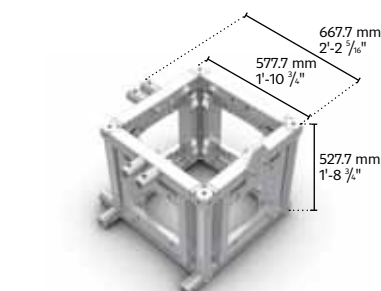
Made with heavy-duty aluminium profiles connected with steel components  
For use with M950 folding truss


**MT2-03|RTTH|SleeveBlock**

Weight	
kg	lbs
80.00	(176.37)

**Sleeve block RTT**


Made with heavy-duty aluminium profiles connected with steel components  
For use with rectangular M950


**MT2-03|FTP|RTO|SleeveBlock**

Weight	
kg	lbs
49.00	(107.90)

**Sleeve Block FTP**

Made with heavy-duty aluminium profiles connected with steel components  
For use with rectangular M400 & folding M520


**MT2-03|QTP|RTO|SleeveBlock**

Weight	
kg	lbs
49.00	(107.90)

**Sleeve block QTP**

Made with heavy-duty aluminium profiles connected with steel components  
For use with rectangular M400 & M520 QUATRO


**MT2-04|ShortOutrigger**

Weight	
kg	lbs
6.00	(13.21)

**Short outrigger**

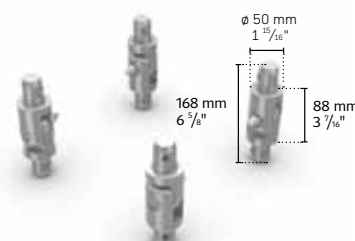
Adjustable spindles; rubber pads


**MT2-05|LongOutrigger**

Weight	
kg	lbs
21.00	(46.24)

**Long outrigger**

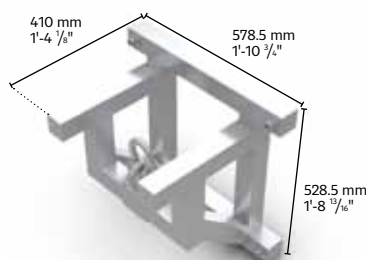
14m (4.59') long, including adjustable spindles; rubber pads


**MT2-07B|Hinges|4pcs**

Weight	
kg	lbs
2.40	(5.25)

**Hinges**

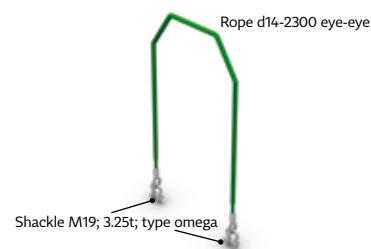
Used to connect the vertical tower pieces and to allow for tilt-up assembly; set of 4pcs


**MT2-09|BracketForMotor|Sleeve**

Weight	
kg	lbs
16.00	(35.26)

**Bracket for chain hoist**


Used for electric chain hoist attachment to sleeve block to achieve max. loading


**MT2-10|FixSet|wire+2xSh3.25t**

Weight	
kg	lbs
4.00	(8.81)

**Safety wire**

Used over MT2 mast top to secure the sleeve block; protected with clear pvc


**MT2-11|Helper**

Weight	
kg	lbs
40.30	(88.74)

Used for assistance in elevating the tower